


## Standard MP3 mode

### Hardware configuration

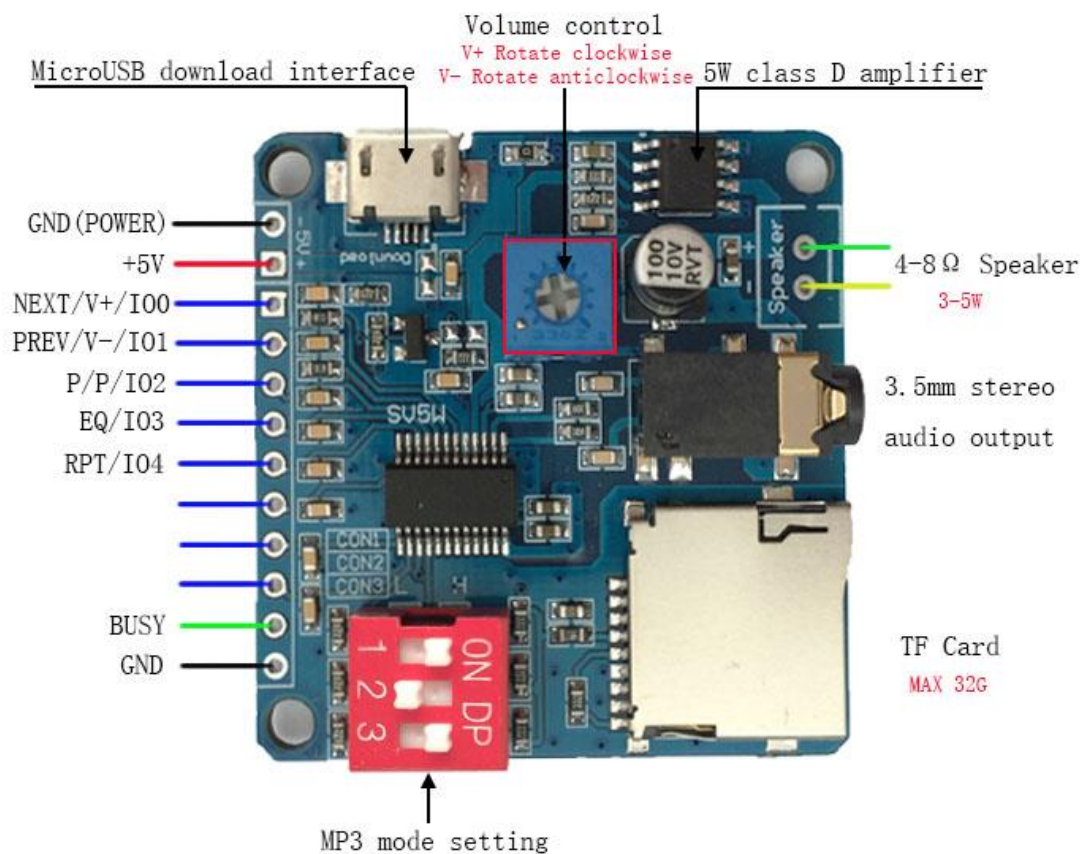

#### Configuration description:

Configure pins			IO description				
CON3	CON2	CON1	IO4	IO3	IO2	IO1	IO0
1	0	1	RPT	EQ	P/P	PREV/V-	NEXT/V+

**Noted:** In this mode, play according to the storage order, that is, first store first play, regardless of the name of the file.

**Pins definition**

GND(POWER)	Power GND
+5V	VCC 5V
NEXT/V+/IO0	Short press “next”, Long press “vol+”
PREV/V-/IO0	Short press “PREV”, Long press “vol-”
P/P/IO2	Short press “pause” Short press again “play”
EQ/IO3	Short press switch “EQ”
RPT/IO4	Short press “single cycle”, Short press again “loop playback”
BUSY	Output low level(0V) while playing, output high level(3.3V) while end playing.
GND	Reference GND

Noted: "Short press" and "long press" are ground trigger (low level trigger).